SC METROMAT SRL

Compartimentul Comercial: 505600 - Sacele - Piata Libertatii nr.2 - tel/fax: 0268 275 212; 0268 276 807 **e-mail: sales@metromat.ro - comert@metromat.ro**

Micrometru mecanic de exterior seria 102.

Specifications	
Accuracy	Refer to the list of specifications
Measuring force	5-10 N
Scale	Thimble and sleeve satin chrome finish ø18 mm
Graduation	0,01 mm
Flatness	0,6 µm
Measuring surfaces	Carbide tipped, micro-lap finish
Measuring spindle	With spindle lock, ø6,35 mm, spindle pitch 0,5 mm
Parallelism	2 µm for 0 to 75 mm model 3 µm for models 75-100 mm
Delivered	Including box, key setting standard (from 25 mm upward), certificate of inspection (0-50 mm range)

Series 102

This Outside Micrometer is a new generation, accurate and reliable device that offers you the following benefits:

- Its heat-insulated frame is tapered (on the anvil side), allowing you to access hard-to-reach places.
- A ratchet stop delivers a constant measuring force.

Only for 0-25, 25-50 mm



102-301

Metric

No.	Range [mm]	Accuracy [µm]	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]
102-301	0-25	±2	30,3	2,8	5	26	6,35
102-302	25-50	±2	55,3	2,8	8	32	6,35
102-303	50-75	±2	80,3	2,8	9	45	6,35
102-304	75-100	±3	105,3	2,8	10	58	6,35


Metric Micrometer set

No.	Range [mm]	Content of Set	Mass [g]
102-911-40	0-100	102-301, 102-302, 102-303, 102-304, 3 setting standards	1200



102-911-40

mm

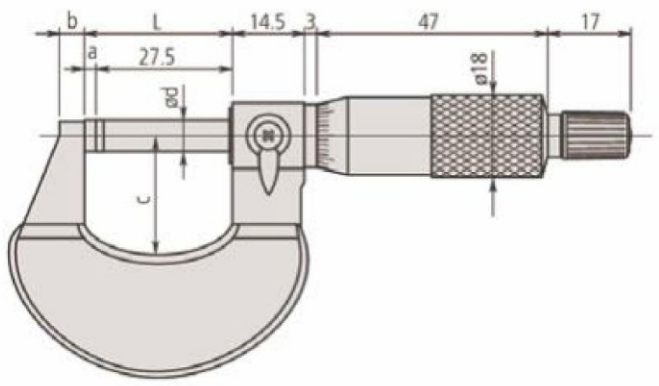

Fotografia are caracter informativ. Aceasta fisa a fost realizata sub rezerva modificarilor de ordin tehnic ulterioare sau a erorilor de editare.

Products and specifications are subject to change without prior notice.