SC METROMAT SRL

Compartimentul Comercial: 505600 - Sacele - Piata Libertatii nr.2 - tel/fax: 0268 275 212; 0268 276 807 **e-mail: sales@metromat.ro - comert@metromat.ro**

ABSOLUTE Digimatic Solar Indicator ID-SS

Series 543

This solar-powered, standard model is environmentally friendly and very easy to use.
The ABSOLUTE Digimatic Solar Indicator ID-SS offers you the following benefits:

- The ABSOLUTE sensor means you don't have to carry out origin setting every time you power it on, saving you time and hassle.
- There's no battery to change.
- The solar cell is operates from just 40 Lux.
- Super-capacitor charge storage enables you to work in low-level lighting conditions of less than 40 Lux.
- You can access all functions by using the large, user-friendly buttons on the front of the indicator.
- Large character height of 9mm provides good readability.

Functions	Series 543
ORIGIN (ABS-Zero)	●
Digimatic data output	●
Counting direction switchable	●

Specifications

Accuracy	Refer to the list of specifications (excluding quantizing error)
Scale	Capacitance type, absolute linear encoder
Max. response speed	Unlimited
Stem Ø	8 mm
Alarm	Counting value composition error
Power supply	Solar cell usable from 40 Lux illumination
Display	LCD character height 9 mm

Optional accessories

No.	Description	
21EZA198	Spindle Lifting Lever, for 12,7mm Range	
540774	Spindle Lifting Cable, 500mm	
21EZA105	Spindle Lifting Knob, for 12,5mm, Metric	
Digimatic Signal Cables		
905338	Digimatic Cable, Flat Straight Type, 1m	
905409	Digimatic Cable, Round 6-Pin Type, 2 m	
02AZD790F	U-WAVE T Connection Cable F, Flat Straight Type	
06ADV380F	USB Input Tool Direct (Digimatic USB) cable, 2m, Flat Straight Type	

For USB Input Tool Direct cable:
a footswitch (no. 937179T), a USB- footswitch adapter (no. 06ADV384) and USB-ITPAK Software (no. 06AEN846) are required.



543-500B



543-505B

Metric

No.	No. Lug back plate	Range [mm]	Digital step	Measuring force [N]	Mass lug/plain [g]	Price [€]
543-500B	543-500	12,7	0,001 mm	≤ 1,5	150/140	**295,00**
543-505B	543-505	12,7	0,01 mm	≤ 1,5	150/140	**148,00**


No. with "B": Flat back plate

Consumable spares

No.	Description	
901312	Contact Element Ball Point, 7,3mm Length, Carbide, Metric	

Illuminance

2000 Lux
engraving

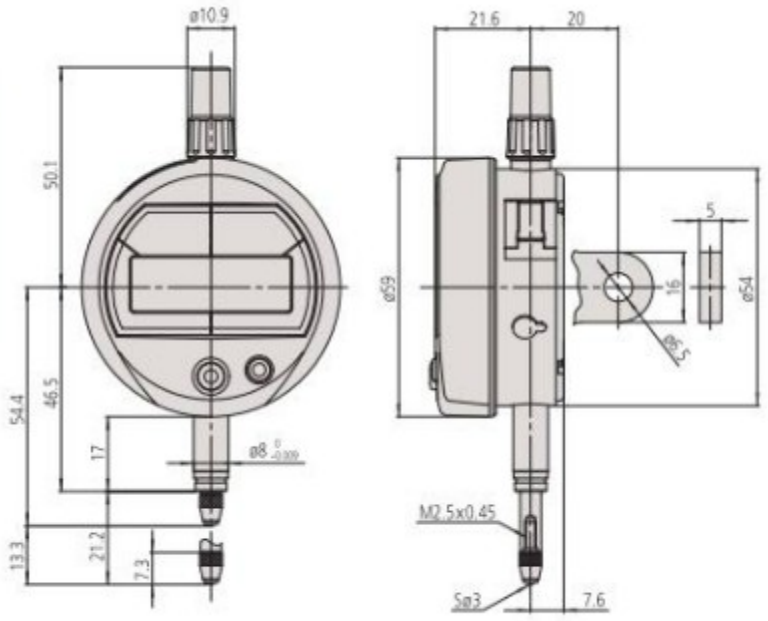

Fotografia are caracter informativ. Aceasta fisa a fost realizata sub rezerva modificarilorde ordin tehnic ulterioare sau a erorilor de editare.

Products and specifications are subject to change without prior notice.