SC METROMAT SRL

Compartimentul Comercial: 505600 - Sacele - Piata Libertatii nr.2 - tel/fax: 0268 275 212; 0268 276 807 e-mail: sales@metromat.ro - comert@metromat.ro

Digital-Taschenmessschieber, IP 67 mit langen Schnäbeln

Digital pocket calipers, IP 67 with long jaws

IP67 | sylvac System | Gehärtet Hardened



No. 1850 131ip

- DIN 862
- Schutzart IP 67, Sylvac System
- Feststellschraube
- rostfreier Stahl, gehärtet
- großes LCD Display
- Kreuzspitzen
- Tiefenmaß eckig
- 4-fach Messung
- Lieferung im Etui

Funktionen:
- Ein/Aus
- Auto-On bei Bewegung
- mm/inch Umschaltung
- 0-Punkt an jeder Position
- Lock Funktion (fester 0-Punkt), absolutes System
- Datenausgang Proximity

- DIN 862
- Protection class IP 67, Sylvac System
- Locking screw
- Hardened stainless steel
- Large LCD display
- Cross points
- Depth gauge angular
- 4-way measurement
- Delivered in a case


Functions:
- On/Off
- Auto-On by sliding
- mm/inch commutation
- Zero setting at any position
- Lock function (fixed 0 point), absolute system
- Data output Proximity

Mit großer 3V Batterie.
With large 3V battery.

1850 13.ip :
Mit Messflächen aus rostfreiem Stahl gehärtet

1850 13.ip :
Hardened stainless steel measuring faces

Hartmetall
Tungsten carbide

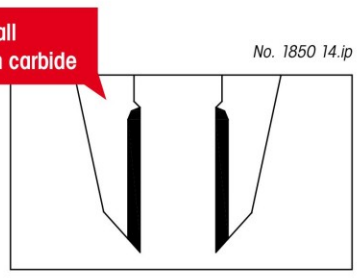

No. 1850 14.ip

1850 14.ip :
Messflächen hartmetallbestückt

1850 14.ip :
Tungsten carbide-tipped measuring faces

mm	inch	mm	mm	inch	kg	№	№
150	6	47	0,01	.0005	0,18	**1850 131ip**	**1850 141ip**
200	8	55	0,01	.0005	0,25	**1850 132ip**	**1850 142ip**
300	12	55	0,01	.0005	0,27	**1850 133ip**	**1850 143ip**
Datenkabel RS232 (2m) / Data cable RS232 (2m)						**1850 203ip**	
Datenkabel USB (2m) / Data cable USB (2m)						**1850 204ip**	

Digital-Taschenmessschieber STANDARD

Digital pocket calipers STANDARD

TOP | Gehärtet Hardened



No. 1850 101abs

- DIN 862
- rostfreier Stahl gehärtet
- großes LCD Display
- Kreuzspitzen
- Tiefenmaß
- 4-fach Messung
- Lieferung im Etui

Funktionen:
- Ein/Aus
- mm/inch Umschaltung
- O-Punkt an jeder Position
- Auto OFF (nicht ABS Modelle)
- ABS/INC Funktion

- DIN 862
- Hardened stainless steel
- Large LCD display
- Cross points
- Depth gauge
- 4-way measurement
- Delivered in a case

Functions:
- On/Off
- mm/inch commutation
- Zero setting at any position
- Auto OFF (not ABS model)
- ABS/INC function



No. 1850 101rt


1850 101abs :
Tiefenmaß eckig

1850 101abs :
Angular depth gauge

1850 101rt :
Tiefenmaß rund ø1,5mm

1850 101rt :
Round depth gauge ø1.5mm

Hartmetall
Tungsten carbide

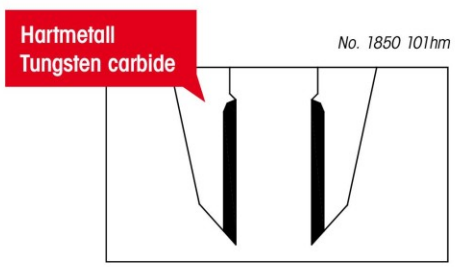

No. 1850 101hm

1850 101hm :
Messflächen hartmetallbestückt, Tiefenmaß eckig

1850 101hm :
Tungsten carbide-tipped meas. faces, Angular depth gauge

mm	inch	mm	mm	inch	kg	№
150	6	40	0,01	.0005	0,4	**1850 101abs**
150	6	40	0,01	.0005	0,4	**1850 101rt**
150	6	40	0,01	.0005	0,4	**1850 101hm**

Fotografia are caracter informativ. Aceasta fisa a fost realizata sub rezerva modificarilorde ordin tehnic ulterioare sau a erorilor de editare.

Products and specifications are subject to change without prior notice.