SC METROMAT SRL

Compartimentul Comercial: 505600 - Sacele - Piata Libertatii nr.2 - tel/fax: 0268 275 212; 0268 276 807 e-mail: sales@metromat.ro - comert@metromat.ro

Micrometru fara rotirea tijei, 3631

PREMIUM QUALITY INSIZE PLUS MADE IN GERMANY

QUICK MEASUREMENT
ONE TURN OF SLEEVE OR RATCHET STOP MAKES 1MM SPINDLE FEED

NON-ROTATING SPINDLE DIGITAL MICROMETER

NON-ROTATING SPINDLE

DATA OUTPUT


- Resolution: 0.001mm/0.00005"
- Repeatability: 1μm
- Measuring force: 5-10N
- Non-rotating spindle, suitable for cylinders
- Quick measurement: one turn of sleeve or ratchet stop makes 1mm spindle feed
- Carbide measuring faces
- Ratchet stop
- Data output
- Button function: mm/inch, max./min. value tracking, tolerance measurement, hold, on/off, zero
- CR2032 battery, automatic power off
- Supplied with setting standards (except 0-25mm/0-1")



3631-25

(mm)

Code	Range	Accuracy	L	a	b
3631-25	0-25mm/0-1"	±2μm	34	188	28.5
3631-50	25-50mm/1-2"	±2μm	59	211	30
3631-75	50-75mm/2-3"	±3μm	84	240	44
3631-100	75-100mm/3-4"	±3μm	109	264	56
3631-125	100-125mm/4-5"	±3μm	134	289	76
3631-150	125-150mm/5-6"	±3μm	160	314	89

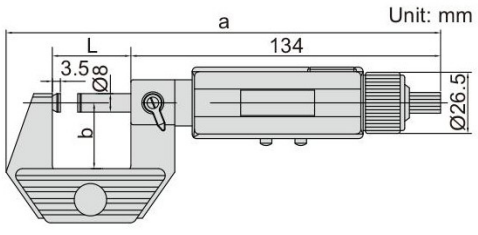

Fotografia are caracter informativ. Aceasta fisa a fost realizata sub rezerva modificarilor de ordin tehnic ulterioare sau a erorilor de editare.

Products and specifications are subject to change without prior notice.